

DEWALT

PERFORM PROTECT™

D25481K 5KG SDS-MAX COMBINATION HAMMER

40mm SDS-Max chuck size ideal for drilling, anchor fixing and through holes in concrete and masonry from 12 to 40 mm in diameter and Core drilling range 40 - 90 mm

Low vibration at 9.4m/s², delivering an impact energy of 6.1 joules minimising user fatigue
EPTA 05/2009 Single impact energy 6.1J


1050W motor excellent power to weight ratio

Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces

3 Mode Hammer functionality:
- Rotation stop mode for chiseling
- Impact stop mode for rotary only; drilling with dry diamond cores
- Percussion drilling mode

Ergonomic grip offers comfort in use

PERFORM PROTECT. Anti-vibration handle reduces user fatigue

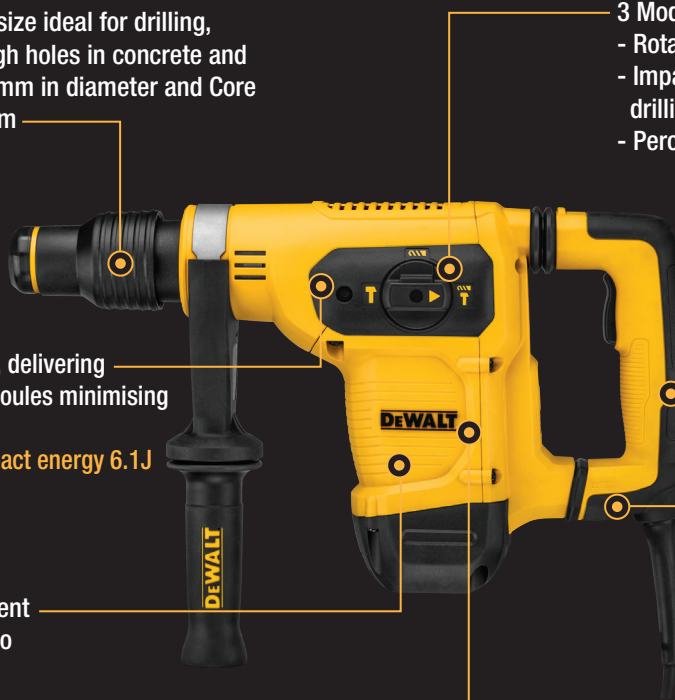

Includes:
Multi-position side handle, Heavy duty carrying case



AVC
ACTIVE VIBRATION CONTROL



D25481K

Tool holder	SDS Max
Power	1050W
Beats per minute	3150 bpm
Max impact energy	7.3 J
Impact energy (EPTA 05/2009)	6.1J
Weight	5.9Kg
Collar diameter	76mm
Variable speed	No
RPM	540
Anti vibration handle	Yes
Vibration emission value (drilling)	9.4 m/s ²
Max drilling concrete/wood/metal	40/35/16
Max core drilling range	45-90
*Optimum Drilling in concrete	16- 30

www.DEWALT.com

GUARANTEED TOUGH.™